

GOTHAM GAC-2 # 10401 - 10412


flexible two conductor microphone cable

GAC-2 (10401-10412)

Balanced Double Shielded Audio Cable:

A flexible professional audio cable for microphones featuring Gotham's renowned "Double Reussen Shielding", matte PVC jacket material in a wide range of colors and finely stranded LCOF 24AWG copper conductors. A unique separation tube between conductors and shields provides increased stability, flexibility and protection of the conductors. Ideal cable for accommodation of XLR-connectors and use in all general purpose balanced applications such as mic cables, line level interconnects, patch cords, etc.

LCOF high grade copper for best performance

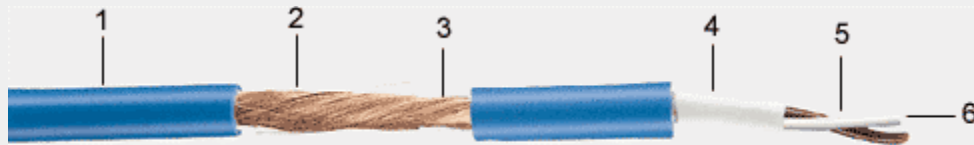

LCOF - Copper

Construction:

1 = Jacket	PVC, Ø 5.4 mm
2 = Shield No. 1	Bare copper wires (0.10 mm) 100% coverage
3 = Shield No. 2	Bare copper wires (0.10 mm) 100% coverage
4 = Separation	PVC, Ø 3.1 mm, white tube
5 = Insulation	PVC, white and brown Ø 1.2 mm, wrapped, twisted pair
6 = Conductor	Stranded bare copper wires 48 x 0.07 mm (0.20 mm ²)

Technical specifications:

Conductor resistance:		< 92 Ohm/km
Shielding resistance:		< 20 Ohm/km
Capacitance:	cond/cond:	< 125 nF/km
	cond/shield:	< 189 nF/km