



**Gotham Audio
Cable**


#85215 and #85225 Gotham AC Power Cables

GPC 3x1.5mm² Power Cable (85215)
GPC 3x2.5mm² Power Cable (85255)
Shielded FRNC up to 240V

European fire-rated and shielded power cable for mains power to your high end audio gear. This cable ensures best transport of AC power to your equipment with effective shielding that will protect your nearby signal cables from hum and noise generated by the 60Hz power passing through the mains cable.

New Product

**Flame retardant FRNC Jacket (IEC 60332-3-24) and EN50266-2-4
Halogen Free IEC 0754-2 and DIN EN 50267-2-21**

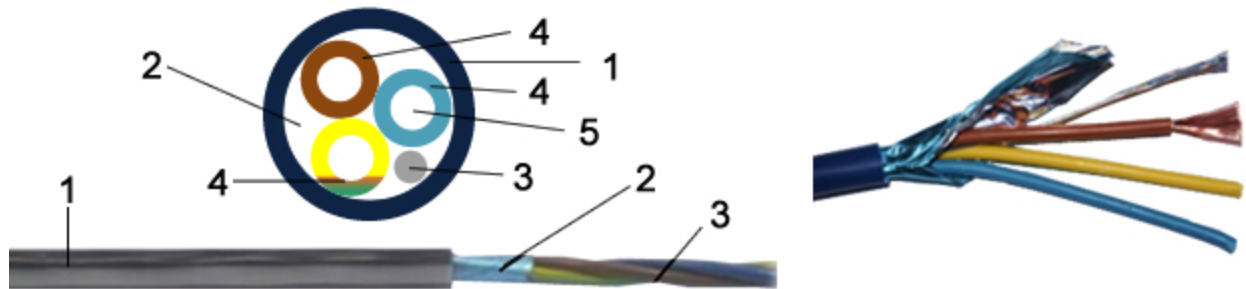

Construction:

1 = Jacket	LSOH, (HM 2 – DIN VDE 0207 part 24) Ø 8.2 mm max., ultrablue	
2 = Shield	Aluminum polyester foil	
3 = Drain wire	19x 0.18 mm SnCu (Ground) tinned copper	
4 = Insulation 3x	LSOH – HI 2, 0.70 mm thickness Nominal Diameter 2.95 mm Color code: Blue-Brown-Yellow/Green	
6 = Conductor	27 x 0.25 mm Cu 1.50 mm ² bare copper stranded	85215
	45 x 0.25 mm Cu 2.2 mm ² bare copper stranded	85225

Technical Specifications:

Conductor resistance:	< 15.5 Ohm/km 85215 / < 8.2 Ohm/km 85225
Rating Voltage:	300/500V
Testing Voltage:	2000 V eff.
Temperature range:	-30°to +70° C

Part #	Type	O.D.	Color	Spool Size	Wt./Spool	Case Unit
85215	GPC-3x1.5mm	8.2 mm	marine blue	100 m	10.9 kg	2 x 100m
85225	GPC-3x2.5mm	9.9 mm	marine blue	100 m	15.7 kg	2 x 100m

Gotham Audio Cable is distributed in the USA and Canada by:

Gotham Audio LLC

P.O. Box 111 • 135 Spring Street, Unit C • Nazareth, PA 18064 USA

Phone: 610-746-9342 • Web: www.gothamaudioussa.com • Email: lewis@gothamaudioussa.com